



### Electrical Characteristics

### SM160-12


Maximum power at STC (Pmax)	160W
Optimum operating voltage (Vmp)	18.3V
Optimum operating current (Imp)	8.75A
Open-circuit voltage (Voc)	22.6V
Short-circuit current (Isc)	9.08A
Short-circuit current temperature coefficient	(0.1) %/C
Open-circuit voltage temperature coefficient	- (0.38) V/C
Peak power temperature coefficient	- (0.47) %/C
NOCT (Air 20°C; Sun 0.8kW/m wind 1m/s)	47±2C
Operating temperature	-40C to 85C
Maximum system voltage	1000V DC
Power tolerance	±3%

STC: Irradiance 1000W/m<sup>2</sup>, Module temperature 25C, AM=1.5


### Features

- Nominal 12V DC for standard output.
- High efficiency.
- Outstanding low-light performance.
- High transmission tempered glass.
- Rugged design to withstands high wind pressure and snow load, easy installation.
- Aesthetic appearance.
- Design to meet unique demand of customer.
- 10 year module output warranty.

### Dimension

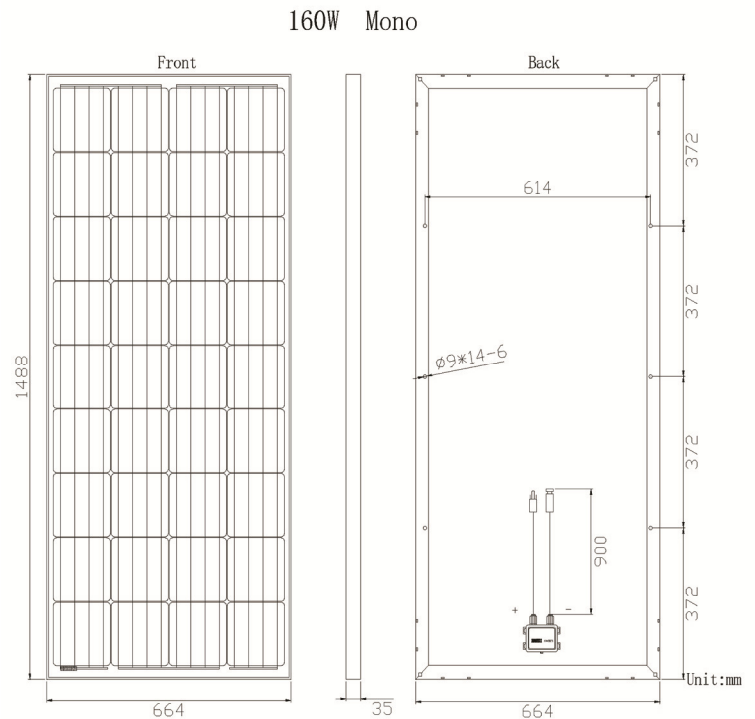

### Characteristics

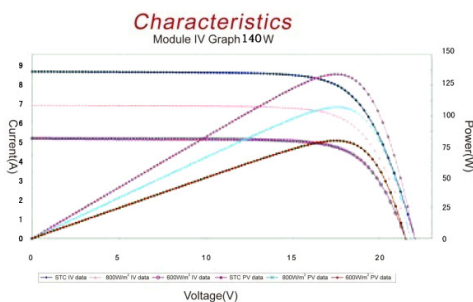

### Specification

### SM160-12

Cell	Mono-crystalline silicon solar cells
No. of cell and connection	36 (4×9)
Dimension of module	1488mm×664mm×35mm
Weight	12.0kg

Specifications are subject to change without notice at any time.