

Features -


- Nominal 12V DC for standard output.
- High efficiency.
- Outstanding low-light performance.
- High transmission tempered glass.
- Rugged design to withstands high wind pressure and snow load, easy installation.
- Aesthetic appearance.
- Design to meet unique demand of customer.
- 10 year module output warranty.

Electrical Characteristics


SM60p-12

Maximum power at STC (Pmax)	60W
Optimum operating voltage (Vmp)	17.4V
Optimum operating current (Imp)	3.73A
Open-circuit voltage (Voc)	21.6V
Short-circuit current (Isc)	4.12A
Short-circuit current temperature coefficient	(0.065±0.015)%/C
Open-circuit voltage temperature coefficient	-(80±10)mV/C
Peak power temperature coefficient	-(0.5±0.05)%/C
NOCT (Air 20°C; Sun 0.8kW/m wind 1m/s)	47±2C
Operating temperature	-40C to 85C
Maximum system voltage	600V DC
Power tolerance	±3%
STC: Irradiance 1000W/m ² , Module temperature 25C, AM=1.5	

Characteristics

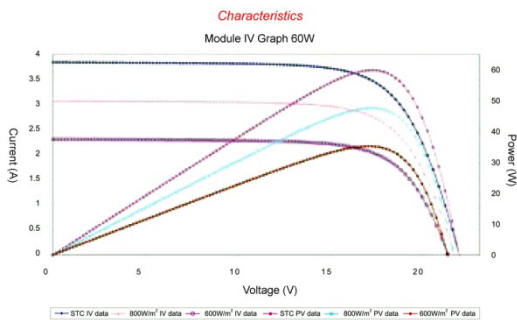

Dimension

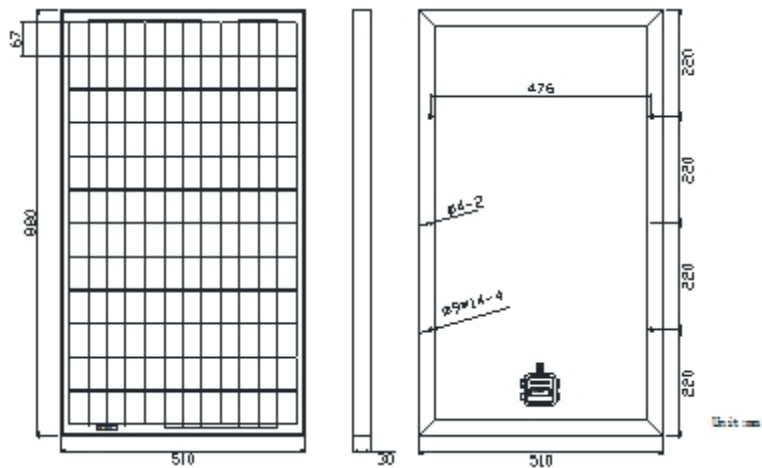

Specification

SM60p-12

Cell	Poly-crystalline silicon solar cells
No. of cell and connection	36 (3×12)
Dimension of module	880mm×510mm×30mm
Weight	6.0kg

Specifications are subject to change without notice at any time.